


HEAT-SEAL STIK[®] EPOXY SEALANT

REPAIR LEAKS IN 90 SECONDS!

- **QUICK, EASY 1-STEP REPAIR**
- **SAVES TIME AND MONEY**
- **WORKS ON ALUMINUM, COPPER, ALL METALS**
- **HOLDS PRESSURES UP TO 450 PSI AND TEMPERATURES UP TO 350° F**

FEATURES:

- Two-part epoxy premixed into stick form, no need to mess with mixing two separate components together.
- One-step repair—melts and cures in one operation. Requires only 250°F temperature from torch or heat gun. Melt the stick into the hole or crack, heat cure for a few seconds and the job is done.
- Restores service immediately, no need to wait overnight for epoxy to cure.
- The durable epoxy repair remains flexible to expand and contract with the metal surface. Will not chip off or crack like brittle epoxies.
- Ideal for repairing small holes, punctures, and cracks right on the job.
- Repairs can be sanded and painted.
- No destructive galvanic action on the metal surface.

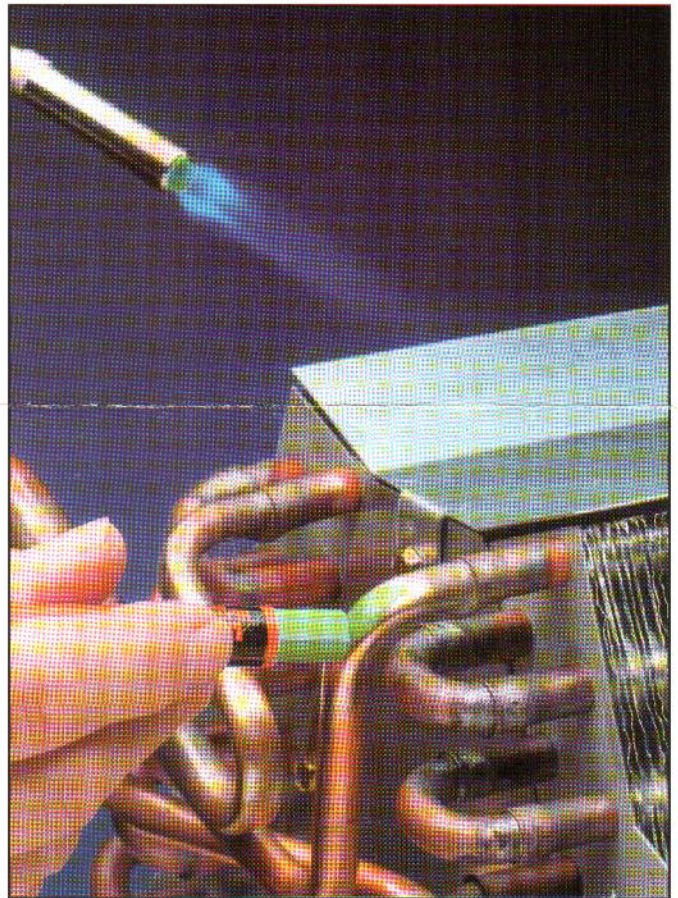

TYPICAL APPLICATIONS:

- Evaporator and condenser coils.
- Refrigeration systems using CFC, HFC, ammonia, and SO₂ refrigerants.
- Water and air piping and tubing.
- Porosity leaks in metal castings.

ORDERING INFORMATION:

Part No.	Size	Qty./Case	Wt./Case
11575	3/8 oz.*	12	1 lb.
11577	3/8 oz. Carded	12	2 lb.

*Display Pack

Call or write for complete information.
Part No. LP97R00027

LA-CO INDUSTRIES, INC./MARKAL COMPANY
1201 Pratt Blvd., Elk Grove Village, IL 60007-5746
(847) 956-7600 FAX: (847) 956-9885
Customer Service Line: (847) 956-3867

Visit us at our website: www.laco.com

Form No. HS797